

# GHR Series Augers





# GHR Series

## Features

- Galvanized main tube
- Painted A-frame, steel undercarriage
- Shielded intake
- Wear Edge Technology™ to extend the life of flighting
- Oil impregnated hardwood driveshaft bearings
- Lubricated upper drive to extend the life of sprockets and drive chain

## Optional Features


- Self-leveling steel intake hopper with tapered transition for efficient grain flow
- Durable poly hoppers for easy grain transfer
- Hydraulic winch with automatic brake to raise and lower the auger
- Speed reducer kit to lower auger speed when needed
- Flex spout to direct grain flow into the bin, reducing spillage
- Swivel arc kit to move the auger around circular bin set ups

## Height, Reach & Wheel Specifications

8" + 10"	A	B	C	D	E	F	G	H	I	J
	HEIGHT LOWERED	HEIGHT HALFWAY	HEIGHT RAISED	REACH LOWERED	REACH HALFWAY	REACH RAISED	HEIGHT AT LIFTARMS	HEIGHT AT WHEELS	REACH AT LIFTARMS	REACH TO WHEELS
31'	7' 8"	15' 1"	21' 6"	13' 9"	12'	9' 3"	8' 10"	12' 10"	7' 8"	70"
36'	9'	17' 4"	24' 10"	16' 3"	14' 3"	11' 2"	10'	14' 4"	8' 11"	82"
41'	9' 7"	20' 2"	28' 7"	18' 8"	16' 4"	12' 8"	11' 6"	16' 4"	10' 2"	88"
46'	10' 10"	22' 7"	31' 6"	20' 11"	18' 3"	14' 3"	12' 9"	18' 1"	11' 6"	88"
51'	11' 11"	25'	35'	23' 1"	20' 2"	15' 10"	14' 2"	19' 11"	12' 10"	94"
56'	11' 5"	26'	38'	25'	21' 6"	16' 2"	16' 10"	23' 2"	13' 1"	112"
61'	11' 8"	28' 4"	41'	27' 4"	24' 4"	19'	17' 2"	24' 3"	16' 2"	112"
71'	12' 10"	33'	47'	31' 8"	28' 1"	22' 6"	19' 8"	27' 6"	18' 5"	118"
13"										
31'	7' 7"	13' 9"	19' 3"	13'	11' 9"	9' 8"	9'	12' 5"	8'	112"
36'	7' 10"	15' 4"	22' 1"	15'	14' 2"	12' 11"	9' 6"	12' 10"	11' 1"	112"
41'	10'	19' 9"	28' 3"	16' 5"	14' 5"	11' 3"	—	—	—	94"
51'	10' 9"	21' 10"	35' 5"	22' 4"	20' 2"	15' 3"	—	—	—	112"
61'	11' 7"	25' 8"	41' 1"	27' 5"	24' 10"	20'	—	—	—	118"
71'	12' 11"	30' 10"	47'	32' 3"	29' 5"	23' 1"	—	—	—	124"

GHR SERIES AUGERS

Heights measured from bottom of auger spout to ground.

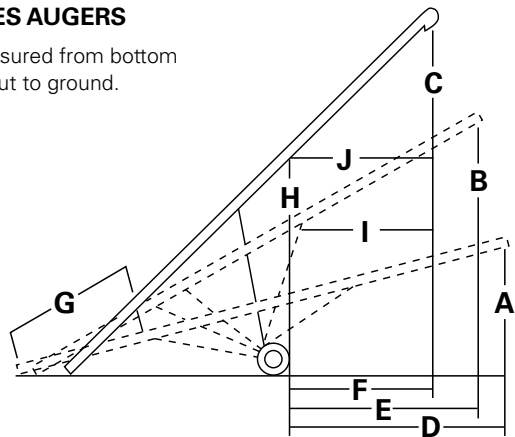

STEEL INTAKE HOPPER

Horsepower Requirements

	8"				10"				13"			
	PTO HP	PTO kW	ELEC. HP	PTO kW	GAS HP	GAS kW	ELEC. HP	ELEC. kW	PTO HP	PTO kW	ELEC. HP	ELEC. kW
31'	16	11.77	5	3.68	30	22.07	7.5-10	5.52-7.36	40		20	
36'	16	11.77	5-7.5	3.68-5.52	—	—	—	—	40-50		20-25	
41'	16	11.77	5-7.5	3.68-5.52	40	29.42	10-15	7.36-11.03	50	44.13	25	14.71
46'	18	13.24	7.5	5.52	—	—	—	—	—	—	—	—
51'	18	13.24	7.5	5.52	45	33.1	15-20	11.03-14.71	70	51.49	NA	NA
56'	30	22.07	10	7.36	—	—	—	—	—	—	—	—
61'	35	25.74	10	7.36	55	40.45	20	14.71	80	58.84	NA	NA
71'	45	33.1	15	11.03	60	44.13	20-25	14.71-18.39	90	66.19	NA	NA



# WHR Series Augers





# WHR Series

AVAILABLE IN ELECTRIC MOTOR DRIVE AND PTO SIDE DRIVE.

## Features


- Powder coat paint for a long lasting finish
- Shielded intake
- Wear Edge Technology™ to extend the life of flighting
- Oil impregnated hardwood driveshaft bearings
- Lubricated upper drive to extend the life of sprockets and drive chain

## Optional Features


- Self-leveling steel intake hopper with tapered transition for efficient grain flow
- Durable poly hoppers for easy grain transfer
- Hydraulic winch with automatic brake to raise and lower the auger
- Speed reducer kit to lower auger speed when needed
- Flex spout to direct grain flow into the bin, reducing spillage
- Swivel arc kit to move the auger around circular bin set ups

## WHR SERIES AUGERS

Heights measured from bottom of auger spout to ground.

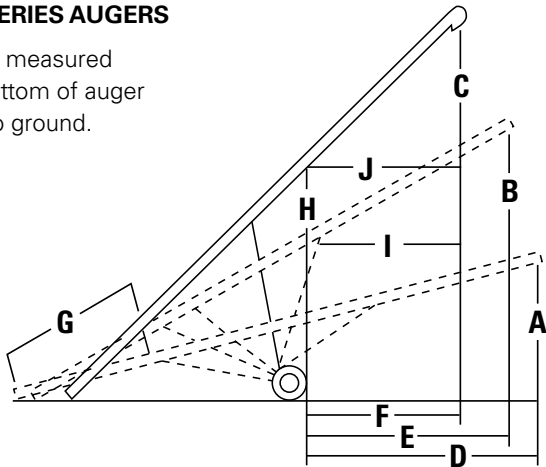

**STEEL INTAKE HOPPER**

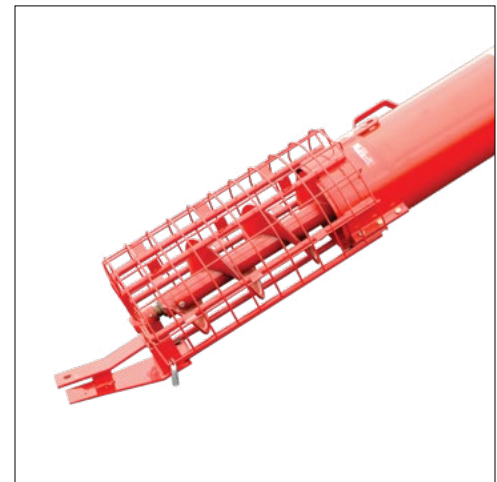

**STEEL INTAKE SHIELD**

## Height, Reach & Wheel Specifications

	A	B	C	D	E	F	G	H	I	J
	HEIGHT LOWERED	HEIGHT HALFWAY	HEIGHT RAISED	REACH LOWERED	REACH HALFWAY	REACH RAISED	HEIGHT AT LIFT ARMS	HEIGHT AT WHEELS	REACH AT LIFT ARMS	REACH TO WHEELS
31'	7' 8"	15' 1"	21' 6"	13' 9"	12'	9' 3"	8' 10"	12' 10"	7' 8"	70"
36'	9'	17' 4"	24' 10"	16' 3"	14' 3"	11' 2"	10'	14' 4"	8' 11"	82"
41'	9' 7"	20' 2"	28' 7"	18' 8"	16' 4"	12' 8"	11' 6"	16' 4"	10' 2"	88"
46'	10' 10"	22' 7"	31' 6"	20' 11"	18' 3"	14' 3"	12' 9"	18' 1"	11' 6"	88"
51'	11' 11"	25'	35'	23' 1"	20' 2"	15' 10"	14' 2"	19' 11"	12' 10"	94"
56'	11' 5"	26'	38'	25'	21' 6"	16' 2"	16' 10"	23' 2"	13' 1"	112"
61'	11' 8"	28' 4"	41'	27' 4"	24' 4"	19'	17' 2"	24' 3"	16' 2"	112"
71'	12' 10"	33'	47'	31' 8"	28' 1"	22' 6"	19' 8"	27' 6"	18' 5"	118"

13"										
31'	7' 7"	13' 9"	19' 3"	13'	11' 9"	9' 8"	9'	12' 5"	8'	112"
36'	7' 10"	15' 4"	22' 1"	15'	14' 2"	12' 11"	9' 6"	12' 10"	11' 1"	112"
41'	10'	19' 9"	28' 3"	16' 5"	14' 5"	11' 3"	—	—	—	94"
51'	10' 9"	21' 10"	35' 5"	22' 4"	20' 2"	15' 3"	—	—	—	112"
61'	11' 7"	25' 8"	41' 1"	27' 5"	24' 10"	20'	—	—	—	118"
71'	12' 11"	30' 10"	47'	32' 3"	29' 5"	23' 1"	—	—	—	124"

## Horsepower Requirements

	8"				10"				13"			
	PTO HP	PTO kW	ELEC. HP	PTO kW	GAS HP	GAS kW	ELEC. HP	ELEC. kW	PTO HP	PTO kW	ELEC. HP	ELEC. kW
31'	16	11.77	5	3.68	30	22.07	7.5-10	5.52-7.36	40		20	
36'	16	11.77	5-7.5	3.68-5.52	—	—	—	—	40-50		20-25	
41'	16	11.77	5-7.5	3.68-5.52	40	29.42	10-15	7.36-11.03	50	44.13	25	14.71
46'	18	13.24	7.5	5.52	—	—	—	—	—	—	—	—
51'	18	13.24	7.5	5.52	45	33.1	15-20	11.03-14.71	70	51.49	NA	NA
56'	30	22.07	10	7.36	—	—	—	—	—	—	—	—
61'	35	25.74	10	7.36	55	40.45	20	14.71	80	58.84	NA	NA
71'	45	33.1	15	11.03	60	44.13	20-25	14.71-18.39	90	66.19	NA	NA



**Wheatheart is an AGI Brand.**

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, South Africa and Italy and distributes its products globally.

**AGI  WHEATHEART**

Box 39, 74 Main Street, Rosenort, Manitoba, Canada R0G 1W0  
866.467.7207 | [sales@wheatheart.com](mailto:sales@wheatheart.com) | [wheatheart.com](http://wheatheart.com)

[AGGROWTH.COM](http://AGGROWTH.COM)

[in](#) [f](#) [t](#) [@](#) [v](#) @aggrowthintl